



MODEL ER341245
Lithium Thionyl Chloride
(Li-SOCl₂) Battery

(International size reference: DD, ER341245)

ELECTRICAL CHARACTERISTICS

(Typical values for cells stored for one year or less, at +25°C)

■ **Nominal capacity** **35Ah**
 (At 10.0 mA, +25°C, 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off voltage.)

■ **Nominal voltage** **3.6 V**

■ **Maximum continuous current** **420 mA**
 (For the fresh cell to get 50% of the nominal capacity at +25°C with 2.0V cut off. Higher currents possible, consult OmniCel)

■ **Maximum pulse capability:** **Typically up to 500 mA**
 (500 mA/0.1 second pulse, drained every 2 min. at 25°C from undischarged cells with 10 uA base current, yield voltage readings above 3.0V. This data is based on the fresh battery performance, voltage readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a Lithium-ion Battery Capacitor or a capacitor may be recommended in severe conditions, consult OmniCel.)

■ **Storage** (Recommended) **+30°C max.**
 (For more severe condition consult OmniCel)

■ **Operating temperature range** **-60°C / +85°C**
 (Operation at temperature different from ambient may lead to reduced capacity and lower voltage plateau readings.)

KEY FEATURES

- ✓ High and stable operating voltage
- ✓ High minimum voltage during pulsing
- ✓ Low self discharge rate (less than 1% after 1 year of storage at +25°C)
- ✓ Stainless steel container
- ✓ Hermetic glass-to-metal sealing
- ✓ Non-flammable electrolyte
- ✓ Restricted for transport (class 9)
- ✓ Compliant with IEC 60086-4 safety standard and EN 60079-11 intrinsic safety standard
- UL Underwriters Laboratories (UL) Component Recognition (File Number MH 28717)

MAIN APPLICATIONS


- ✓ Utility metering
- ✓ Alarms and security devices
- ✓ Memory back-up
- ✓ Tracking systems
- ✓ Automotive electronics
- ✓ Professional electronics ... etc.

WARNING:


Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 212°F (100°C), incinerate, or expose contents to water. Do not solder directly to the cell, use tabbed cell instead.

Note: Information in this document is subject to change without notice. Any representations in this data sheet concerning performance are for informational purpose only and are not construed as warranties, either expressed or implied, of future performance.

Typical Discharge Profile @ +20°C (Median value)

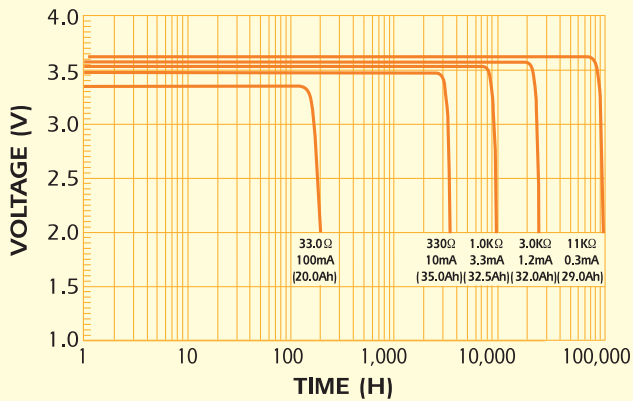

ER341245

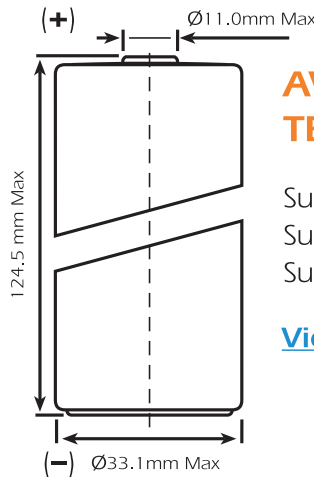


AVAILABLE TERMINATIONS

Suffix -/S	Standard
Suffix -/T	Solder Tabs
Suffix -/W	Wire Leads

[View available terminations](#)


Voltage Plateau versus Current and Temperature (At min. discharge)

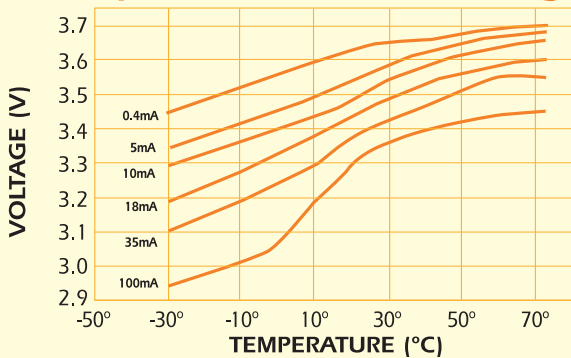

Physical Characteristics

■ Diameter (max)	32.9 mm (1.295")
■ Height (max)	124.5 mm (4.901")
■ Typical weight	195 g (6.878oz)
■ Lithium content	9.07 g (0.319oz)

Capacity versus Current and Temperature (2.0 V cut off)

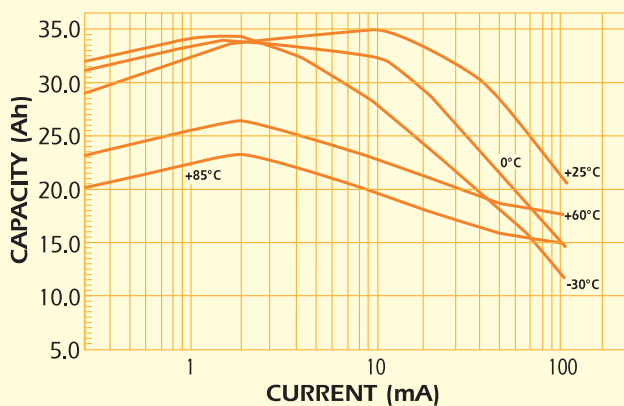

Storage Characteristics

