



**MODEL EF651625**  
**Lithium Thionyl Chloride**  
**(Li-SOCl<sub>2</sub>) Battery**

(International size reference: LTC-7PN, EF651625)

**ELECTRICAL CHARACTERISTICS**

(typical values for cells stored for one year or less, at 25°C)

■ **Nominal capacity** **0.75Ah**  
 (at 1.0 mA, +25°C, 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off voltage.)

■ **Rated voltage** **3.6 V**

■ **Maximum recommended continuous current** **10 mA**  
 (to get 50% of the nominal capacity at +25°C with 2.0V cut off. Higher currents possible.)

■ **Pulse capability:** varies according to pulse characteristics (frequency, duration), temperature, cell history (storage conditions prior to usage) and the application's acceptable minimum voltage.

■ **Maximum pulse current capability** **30 mA**  
**Rated 1 sec. pulse capability (to 3V)** **15 mA**

■ **Storage** (recommended) **30°C max**  
 (possible without leakage) **-55° / +120°C**

■ **Operating temperature range** **-55° / +85°C**  
 (Operation at temperature different from ambient may lead to reduced capacity and lower voltage plateau readings.)

**⚠ WARNING:**

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 212°F (100°C), incinerate, or expose contents to water.

**KEY FEATURES**

- ✓ High and stable operating voltage
- ✓ High minimum voltage during pulsing
- ✓ Low self discharge rate (less than 1% after 1 year of storage at +25°C)
- ✓ Stainless steel container
- ✓ Hermetic glass-to-metal sealing
- ✓ Non-flammable electrolyte
- ✓ Compliant with IEC 86-4 safety standard and EN 50020 intrinsic safety
- ✓ Non restricted for transport


⚠ Underwriters Laboratories (UL) Component Recognition (File Number MH 47566)

**MAIN APPLICATIONS**


- ✓ Utility metering
- ✓ Alarms and security devices
- ✓ Memory back-up
- ✓ Tracking systems
- ✓ Tollgate systems
- ✓ Automotive electronics
- ✓ Professional electronics ... etc.

Note: Any representations in this data sheet concerning performance are for informational purpose only and are not construed as warranties, either expressed or implied, of future performance.


## DISCHARGE CHARACTERISTICS @ +25°C

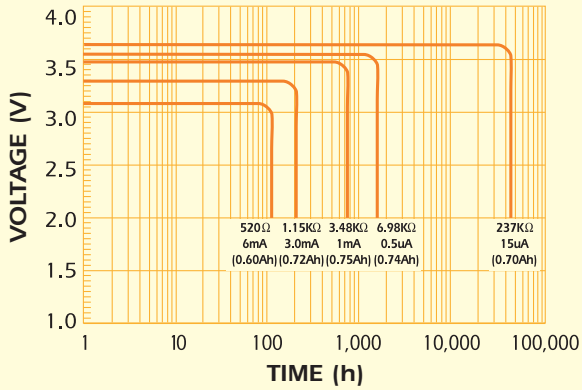


## VOLTAGE VS. TEMPERATURE

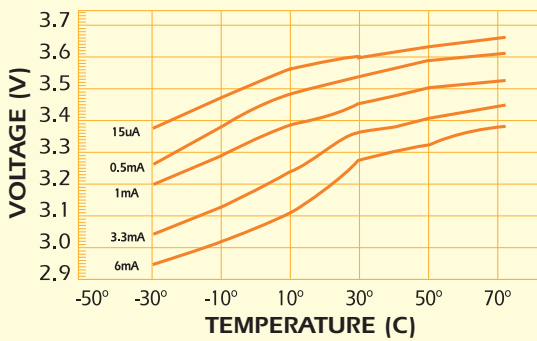

## CAPACITY VS. CURRENT

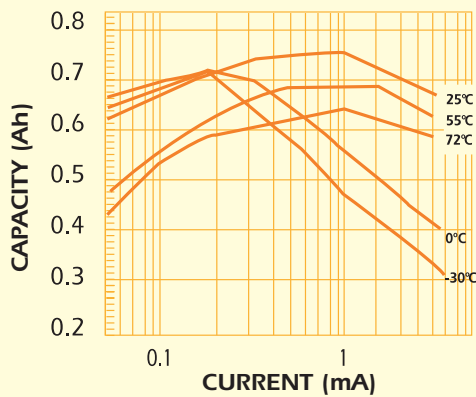

## EF651625

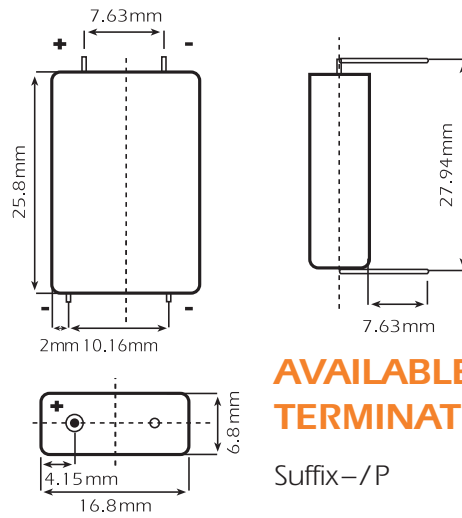

## AVAILABLE TERMINATIONS

Suffix -/P Tinned Nickel Pins

## PHYSICAL CHARACTERISTICS

Width (max)	16.8 mm (0.661")
Length (max)	25.8 mm (1.016")
Height (max)	6.8 mm (0.268")
Typical weight	8 g (0.282oz)

## STORAGE CHARACTERISTICS

